SCHNEPP
ELEKTRONISCHE BAUTEILE

Datasheet
ISSUE 2026-11-22

KELVIN CLIPS

K 55

Kelvin clip K 55 (small), 55 mm long, 5 mm opening

30 V AC / 60 V DC	55 mm	5 mm
RATED VOLTAGE	LENGTH	JAW OPENING



Shown: red and black

TECHNICAL DATA

Electrical and mechanical data

Rated voltage	**30 V AC / 60 V DC**
Contact	**Brass profile, finely toothed, hard-gold-plated, 6 × 2 mm, tips 2 × 2 mm**
Length	**55 mm**
Jaw opening	**5 mm**
Weight	**7 g**

Materials and finish

Cable	**1.5 m, coax RG 174 U or LiFY 0.5 mm²**
Connectors	**4 mm gold-plated, BNC or circular connector** K55-BAN · K55-BNC · K55-RS*

FEATURES


- For the tightest spaces and the thinnest coil and lead wires
- Low weight protects the test object
- EMC version without ferromagnetic parts
- Spring force from insulating, ozone- and UV-resistant elastomer rings
- Kink protection and strain relief
- Marking sleeves +U, –U, +I, –I
- Special versions on request

COLOURS 2

black · red

DIMENSIONED DRAWING

Dimensions in mm

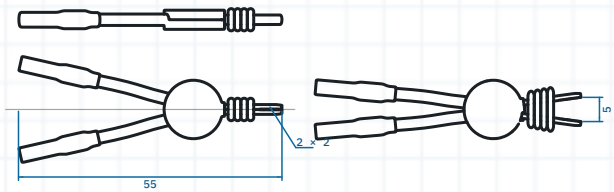

CUSTOMISATION

Adapted to your application

Also fully custom connectors based on our bundle-wire and spring-basket technology, with matching sockets.

info@schnepp-neudenau.de · +49 6264 9203-0

Marking
Colours and marking to your system

Name and logo printing
On request

Length to order
Cable length as you specify

Special versions
Connector and cable to your specification

Schnepp GmbH
Auweg 5
74861 Neudenau
Germany

PHONE +49 6264 9203-0
EMAIL info@schnepp-neudenau.de
WEB schnepp-neudenau.de

Quality management certified to ISO 9001:2015