SCHNEPP
ELEKTRONISCHE BAUTEILE

Datasheet
ISSUE 2026-11-23


CLIPS AND BINDING POSTS

SP 2080

Binding post SP 2080, 15 x 41 mm, M5, 15 A

15 A
RATED CURRENT

30 V AC / 60 V DC
RATED VOLTAGE

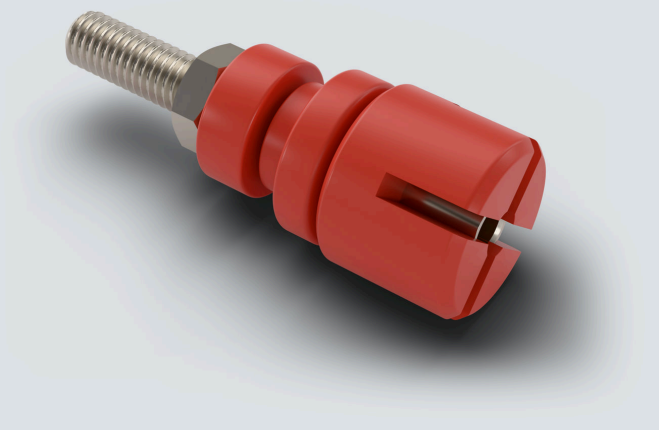

Shown: rendering, red

TECHNICAL DATA

Electrical and mechanical data

Rated voltage	**30 V AC / 60 V DC**
Rated current	**15 A**
Temperature range	**–15 °C to +75 °C**
Dimensions	**Ø 15 × 41 mm**

Materials and finish

Finish	**Nickel**
Housing material	**ABS**
Connection	**M5 thread with nuts, Ø 4 mm**

Conformity

RoHS	**compliant**

Dimensions and dimensioned drawing on request.

COLOURS 5

black · red · blue · yellow · grey

CUSTOMISATION

Adapted to your application

Also fully custom connectors based on our bundle-wire and spring-basket technology, with matching sockets.

info@schnepp-neudenau.de · +49 6264 9203-0

Special version
To your drawing or specification

Schnepp GmbH
Auweg 5
74861 Neudenau
Germany

PHONE +49 6264 9203-0
EMAIL info@schnepp-neudenau.de
WEB schnepp-neudenau.de

Quality management certified to ISO 9001:2015